


Hall effect spool position sensors

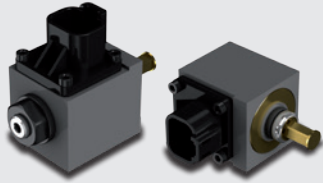

- SPSD type
- SPSL type

Spool position sensors

Accuracy, reliability and repeatability are the main features of Walvoil position sensors.


Converts the spool movements into an electric digital signal or into a voltage linear signal.

| Working conditions | SPSD | SPSD-S | SPSL | SPSL-S |
|-------------------------------------|--|-----------------------------|--|-----------------------------|
| Voltage supply | from 9 to 32 VDC | | from 9 to 32 VDC or 5 VDC | |
| Current absorption | < 10 mA (no load) | | < 10 mA (no load) | |
| Mechanical life | 3x10 ⁶ | | 3x10 ⁶ | |
| Connector type | DT04-4P Deutsch | | DT04-4P Deutsch | |
| Weather protection | IP67 / IPX9K | | IP67 / IPX9K | |
| Working temperature | from -40°C to 105°C (<i>from -40°F to 221°F</i>) | | from -40°C to 105°C (<i>from -40°F to 221°F</i>) | |
| Working pressure | 350 bar (<i>5100 psi</i>) | | 350 bar (<i>5100 psi</i>) | |
| Max. electrical stroke | ±10 mm (<i>±0.39 in</i>) | ±5.5 mm (<i>±0.22 in</i>) | ±10 mm (<i>±0.39 in</i>) | ±5.5 mm (<i>±0.22 in</i>) |
| Max. mechanical stroke | ±10 mm (<i>±0.39 in</i>) | ±5.5 mm (<i>±0.22 in</i>) | ±10 mm (<i>±0.39 in</i>) | ±5.5 mm (<i>±0.22 in</i>) |
| EMC compatibility | ISO 13766 / ISO 14982 | | ISO 13766 / ISO 14982 | |
| Mechanical vibrations, shock, bumps | IEC 68-2-6,-27,-29 | | IEC 68-2-6,-27,-29 | |
| Output signal | PNP | | / | |
| type | PNP | | / | |
| max. current | 6 mA | | / | |
| range | / | | from 0.5 to 4.5 V | |
| linearity | / | | ± 5% | |
| spool in neutral | / | | 2.5 ± 0.2 V | |
| max. current | / | | 1 mA | |

Spool position sensors

Hall effect spool position sensors

SPSD type

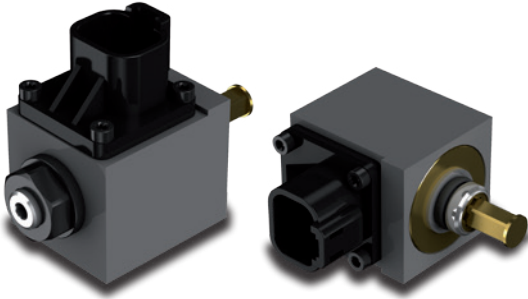

The SPSPD position sensor converts the spool movements into an electric digital signal.


Main features are:

- contactless technology guarantees a long mechanical life;
- available for the complete range of valves.

Typical applications:




- cranes
- telehandlers
- aerial platforms
- front-end loaders (mid-mount)

Output signal (SPSD example) vs. spool stroke

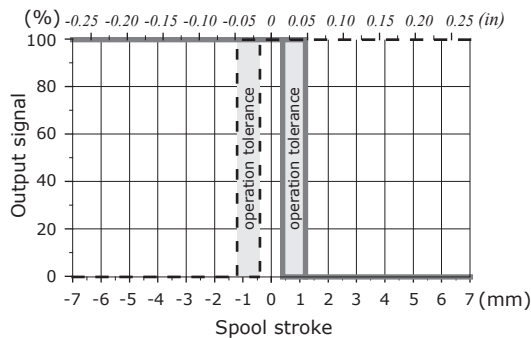

— out A
- - - out B

| Mating connector | |
|------------------|-----------------|
| Code | Type |
| 5CON140072 | DT06-4S Deutsch |

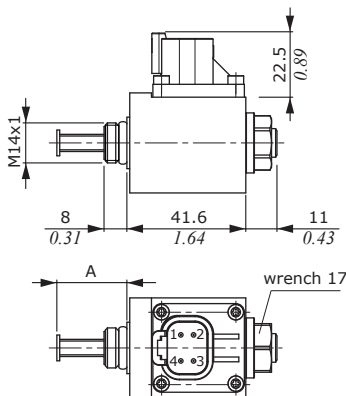

A = feeler neutral position.
As for the sensor model,
the dimension can be 16 or
21.5 mm (0.63 or 0.85 in)

| * | mm | in |
|--------|----|------|
| SPSD | 35 | 1.38 |
| SPSD-S | 31 | 1.22 |


Connector PIN-OUT

| Pin | Functions |
|-----|-----------|
| 1 | Out A |
| 2 | GND |
| 3 | VB+ |
| 4 | Out B |

SPSL ordering codes

| Code | Description | Electrical stroke | Mechanical stroke | Supply |
|--------------|---------------------------|----------------------|----------------------|----------------|
| 5SE210021D01 | SPSD/M1021/PNP/D4P/v1.0 | ±10 mm (±0.39 in) | ±10 mm (±0.39 in) | from 8 to 32 V |
| 5SE310021D01 | SPSD-S/M1021/PNP/D4P/V1.0 | ±10 mm (±0.39 in) | ±10 mm (±0.39 in) | from 8 to 32 V |

Example of sensor in 8EZ control with DPX100 working section

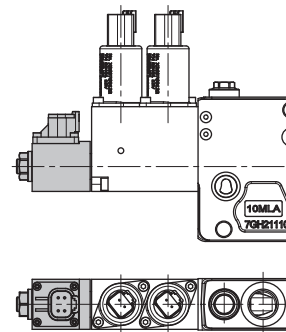


IMPORTANT: It is suggested to order the sensors through the controls assembled on the monoblock and sectional valves.

These controls, in different configurations, are available on the full range of Walvoil directional valves.

Hall effect spool position sensors

SPSL type

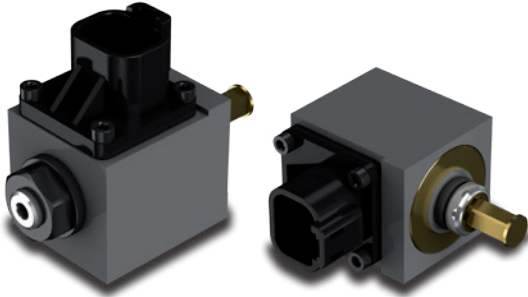

The SPSL position sensor converts the spool movements into a linear voltage signal.


Main features are:

- contactless technology guarantees a long mechanical life;
- available for the complete range of valves.

Typical applications:

- cranes
- telehandlers
- aerial platforms
- front-end loaders (mid-mount)

Output signal (SPSL example) vs. spool stroke


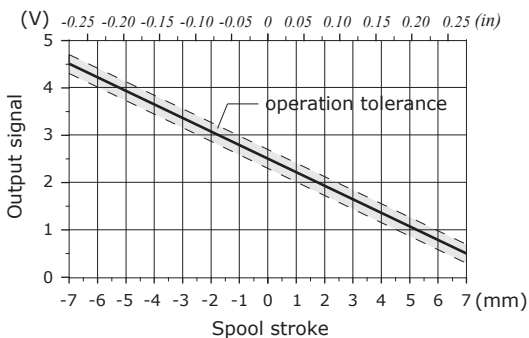


SPSL ordering codes

| Code | Description | Electrical stroke | Mechanical stroke | Supply |
|--------------|-------------------------------|-----------------------|-----------------------|----------------|
| 5SE221021D01 | SPSL/0.5(OUT)-4.5(IN)-CR10 | ±10 mm (±0.39 in) | ±10 mm (±0.39 in) | 5 V |
| 5SE225516D01 | SPSL/0.5(OUT)-4.5(IN)-CR5.5 | ±5.5 mm (±0.22 in) | ±10 mm (±0.39 in) | 5 V |
| 5SE226516D01 | SPSL/0.5(OUT)-4.5(IN)-CR6.5 | ±6.5 mm (±0.26 in) | ±6.5 mm (±0.26 in) | 5 V |
| 5SE227021D01 | SPSL/0.5(OUT)-4.5(IN)-CR7 | ±7 mm (±0.27 in) | ±10 mm (±0.39 in) | 5 V |
| 5SE228021D01 | SPSL/0.5(OUT)-4.5(IN)-CR8 | ±8 mm (±0.31 in) | ±10 mm (±0.39 in) | 5 V |
| 5SE236521D01 | SPSL/8-32V/0.5(OUT)-4.5(IN) | ±6.5 mm (±0.26 in) | ±10 mm (±0.39 in) | from 8 to 32 V |
| 5SE325521D01 | SPSL-S/0.5(OUT)-4.5(IN)-CR5.5 | ±5.5 mm (±0.22 in) | ±10 mm (±0.39 in) | 5 V |

Mating connector

| Code | Type |
|------------|-----------------|
| 5CON140072 | DT06-4S Deutsch |

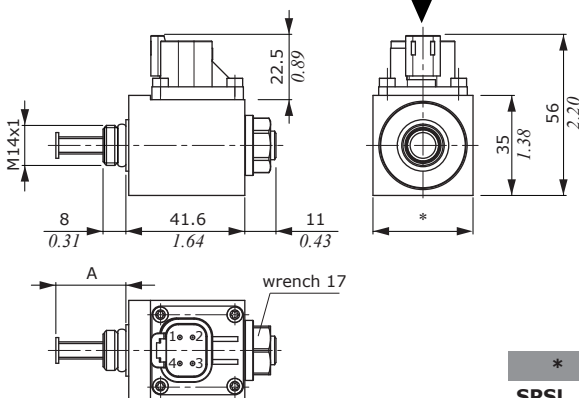


A = feeler neutral position.
As for the sensor model, the dimension can be 16 or 21.5 mm (0.63 or 0.85 in)

| * | mm | in |
|--------|----|------|
| SPSL | 35 | 1.38 |
| SPSL-S | 31 | 1.22 |

Connector PIN-OUT

| Pin | Functions | |
|-----|---------------|---------------|
| | 5V supply | 8-32V supply |
| 1 | + 5V | signal OUT |
| 2 | not connected | GND |
| 3 | GND | VB+ |
| 4 | signal OUT | not connected |

Example of sensor in 8EZ control with DPX100 working section

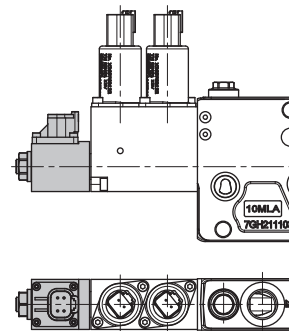

IMPORTANT: It is suggested to order the sensors through the controls assembled on the monoblock and sectional valves.

These controls, in different configurations, are available on the full range of Walvoil directional valves.